

NF.DPG3000


Pressure Unit Choices Available: psi–Bar–MPa
9V-DC Battery Power with Auto-Off Function
Zero Offset
LCD Digital Display
ISO 9001

DPG3000 Digital Pressure Gauge offers $\pm 0.5\%$ full scale accuracy, while SS316 wetted part provides a variety of applications in media of fluids and gases for the industrial field and the commercial field.

TECHNICAL DATA

Accuracy: $\pm 0.5\%$ of full scale
LCD Display: 30X 14.5cm, with 4 digits
Dimension: 3", H11.5 X W4.5cm
Operating Temperature: -10 to 60°C
Over Pressure: 2 times of F.S.
Process Connections: 1/4" NPT Male, standard
Connection Material: SS316
Multiple Pressure Limit: Psi, Bar, MPa
Response Time: <1 ms
Total Error (Typical): $\pm 1.00\%$
LCD Resolution: XX.X1/X.XX1/XXX.1

DIMENSIONS

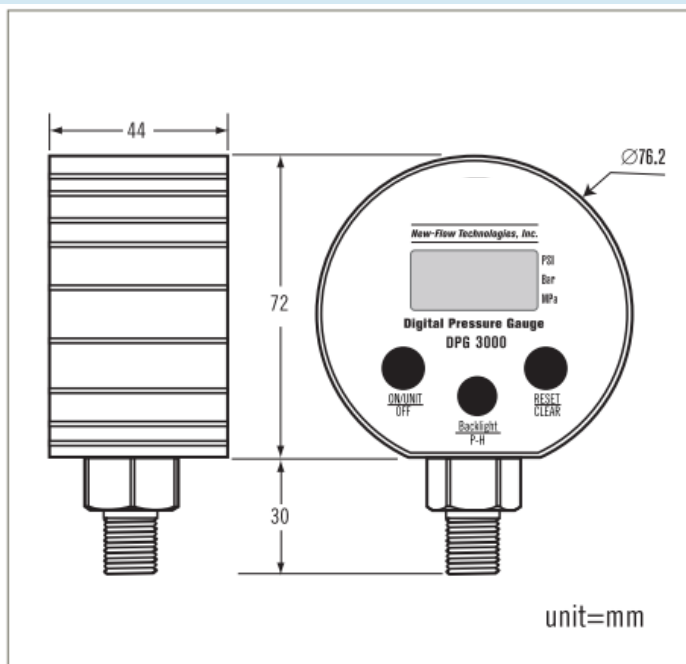

Pressure Range	Accuracy	Resolution		
		PSI	Bar	MPa
100 PSI	Tpy. $\pm 0.5\%$ F.S.	0.01	0.001	0.01
500 PSI	Tpy. $\pm 0.5\%$ F.S.	0.1	0.01	0.01
1000 PSI	Tpy. $\pm 0.5\%$ F.S.	0.1	0.01	0.1
3000 PSI	Tpy. $\pm 0.5\%$ F.S.	1	0.1	1

Le caratteristiche dichiarate possono cambiare senza alcun preavviso



Per ordini:
 Tel.: +39 011 198 218 39
 E-mail: commerciale@asit-ge.com



DIGITAL PRESSURE GAUGE

NF.DPG3000

APPLICATIONS

Refrigeration Systems	Gas Dynamics
Level Systems	Sequencing Control
Flow System	Control & instrumentation
Pump	Agriculture
Cylinder Valve	Car industry
Water Sprinkling System	Heating, Ventilation, Air Condition (HVAC)

ORDERING INFORMATION

DPG3000	Code	Pressure Range		
↓	1	100psi		
	5	500psi		
	10	1000psi		
	30	3000psi		
			Code	Connection port
			U	1/4"NPT (standard)
			S	Customized
			Code	Type
			A	9V DC Battery
↓	↓	↓	↓	
DPG3000				Complete Ordering Code

Le caratteristiche dichiarate possono cambiare senza alcun preavviso



Per ordini:
Tel.: +39 011 198 218 39
E-mail: commerciale@asit-ge.com



ASIT ITALIA S.r.l.

Sede operativa e Uffici

Via Quintino Sella, 6 - 10020 Riva presso Chieri (TO)

T +39 011 198 218 39 - F +39 011 198 371 06

<http://www.asit-ge.com> - info@asit-ge.com

