


GS.MT_400_12

GENERAL:

The MT 400 is small, lightweight and easy-to-use. Just aim, trigger and read the temperature from the display... and that's it. Anyone, who searches for fast and reliable temperature measurement, should take a closer look on the MT 400 infrared thermometer.

APPLICATIONS:

- Electrics – locating overheated cables and contacts
- Heating / ventilation / air-conditioning monitoring of heat exchanger
- Food – Checking food temperature during keeping warm or storing

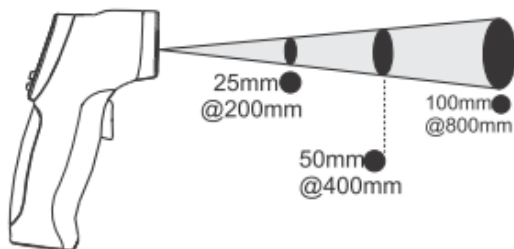

SPECIFICATIONS:

Measuring range:	-20 °C ... +343 °C
Resolution:	0.1 °C, 0.1 °F
Accuracy: (@ 18 °C ... 28 °C and < 80 % RH)	
< -7 °C:	±4 °C
≥ -7 °C:	±2% of meas. value +2 °C
Optical resolution (D/S):	approx. 8:1
Response time (t95):	< 1 s
Spectral range:	8- 14 μm
Emission rate:	permanently set to 0.95
Sight:	single laser
Working temperature:	0 ... 50 °C
Storage temperature:	-20 ... +60 °C
Power supply:	9 V battery
Features:	°F, background illumination
Dimensions:	82 x 41,5 x 160 mm
Weight:	180 g
Scope of supply:	Device, battery, manual

ACCESSORIES AND SPARE PARTS:

GB 9 V

Product-ID: 601115
spare battery

GKK 3100

Product-ID: 601058
case with foam lining (275 x 229 x 83 mm)

Le caratteristiche dichiarate possono cambiare senza alcun preavviso



Per ordini:
Tel.: +39 011 198 218 39
E-mail: commerciale@asit-ge.com



ASIT ITALIA S.r.l.

Sede operativa e Uffici

Via Quintino Sella, 6 - 10020 Riva presso Chieri (TO)

T +39 011 198 218 39 - F +39 011 198 371 06

<http://www.asit-ge.com> - info@asit-ge.com

